

Features

- Hand held
- Operated on (4) AA batteries
- LED backlight
- Great portable video tester




Specifications

Screen	2.5" LTPS TFT LCD
Resolution	882 x 228 201,696 dots
View Angle	L/R : 45 degree(TYP) Up : 17 degree(TYP) Down : 35 degree(TYP)
Contrast Ratio	150(TYP)
Back-Light	LED
Brightness	150nit(TYP)
Life Time	10,000 Hrs.
DC Jack	ø = 3.75 mm x 1.3 mm
Video Input	RCA Jack
Battery	AA x 4
DC Power Input	6V±15%
Power Consumption	3W
Operation Voltage	4V-6V
Operation Temperature	-0°C - 40°C
Storage Temperature	-30°C - 80°C
Dimension	70.4 x 94.9 x 29.0 mm (W x L x D)
Weight	125 g ± 5 g

Specifications

Screen	3.5" Colour TFT-LCD Active Matrix Monitor
Input Signal	NTSC
Dot Format	480 x 234
Back Light	CCFL
Lamp Life	10,000 Hrs.
Brightness Rating	200 NITS
Contrast Ratio	150:1
Viewing Angle (L/R/T/B)	45°/45°/10°/30°
Power Requirements	12V DC @ 350 mA
Dimensions (HxWxD)	4 5/16" x 3 1/2" x 1 1/2"
Operating Temperature	0° - -60°
Storage Temperature	-25°C - 80°C

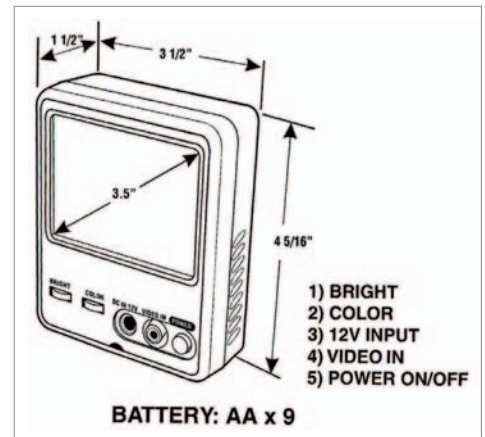

BOCK OPTRONICS INC.
 14 Steinway Blvd., Unit 7
 Toronto, Ontario M9W 6M6, Canada
 Tel: 416-674-2804 Fax: (416) 674-1827

Quebec & Eastern Canada
 Tel: 450-662-9889
 Fax: 450-662-9063

Website: www.bockoptronics.ca
 E-mail: sales@bockoptronics.ca