

Update!

# HAN SERIES

FIREWIRE DIGITAL CAMERA LINEUP

COLOR

**Compact Size**

**IIDC1.31 compliant**

**YUV / AWB / Ext. Trigger**

**Auto Sync. / LUT**



## IMI HAN SERIES IMC-1070FT/1050FT/1040FT

### Overview

The HAN SERIES comprises a host of features in an ULTRA COMPACT form factor; while supporting the highest frame rate compared to competing models.

The small form factor provides more versatility in space and weight



considerations to benefit the actual operation and installation. Every unit has passed our rigorous testing procedure to ensure reliability even in mission critical applications.

*FIREWIRE WITH EXTERNAL TRIGGER  
And INDUSTRIAL LOCK SCREW CONNECTOR*



### Features

The fully IIDC 1.31 compliant HAN SERIES supports up to 16 FPS at 1600 x 1200 and is rich in features necessary for all applications. The External Trigger supports mode 0, 1, 2, 3, 4, 5 and 14 which are unique compared with others. All models support Photo-coupler and multi camera auto sync, which are ideal for application for multiple cameras, and other advanced features such as memory save/load and one-shot and multi-shot capability. In addition, RS232 Pass through, 1us ~ 3600s shutter speed, True Speed Format 7 Partial Scan, LUT (4point, user defined), horizontal and vertical Binning mode would provide maximum flexibility for challenging applications. The latest RHEIN SERIES firmware can be upgraded via FIREWIRE, and can be downloaded together with SDK and Demo Applications from our website.

### Applications

Machine Vision & ITS(LPR)

Semi Con Inspection

F&B Inspection

Microscopy & Medical

Industrial Analysis

Bar Code, OCR, OCV

For Sales Inquiry and Technical Support ▶



IMI TECHNOLOGY CO., LTD.

#2 Eun-Seok Bldg. 729-1 Yeoksam-Dong


Gangnam-Gu, Seoul 135-080, Korea

Tel : 82-2-527-9800 Fax : 82-2-527-9900

Email : sales@imi-tech.com

Website : www.imi-tech.com

## Dimension (in mm)

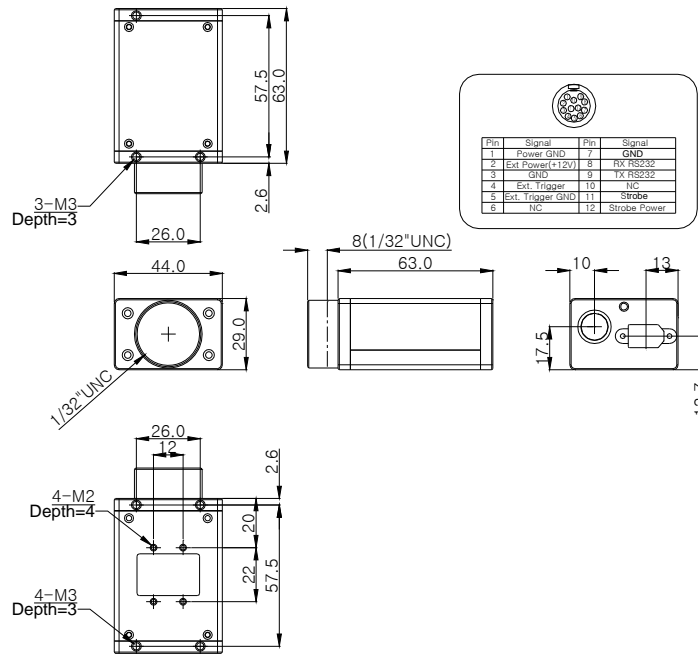

## Specifications



Features	IMC-1070FT	IMC-1050FT	IMC-1040FT
Image Sensor	1/2" progressive scan CCD Sony ICX415AL	1/2" progressive scan CCD Sony ICX414AL	1/3" progressive scan CCD Sony ICX424AL
Picture Size	780(H) x 580(V)	640(H) x 480(V)	640(H) x 480(V)
Data Output	YUV422, Y8, Y16		
Pixel Depth	12 bit		
Pixel Size	8.30 x 8.30 um	9.90 x 9.90 um	7.40 x 7.40 um
FPS at Max resolution	60 FPS(Format 7 mode 0)	86 FPS(Format 7 mode 0)	86 FPS(Format 7 mode 0)
Scanning System	Progressive Scan		
Binning	Not Supported		
Format7	Partial Scan (Unit : 4x4)		
External Trigger	Mode 0, 1, 2, 3, 4, 5, 14, 15 (Photo-coupler)		
Strobe Output	Active Low or High, Support Normal Mode or Trigger Mode (Photo-coupler)		
Memory Save/Load	16 Channels(0:factory, 1~4:feature, 5~15:mode/feature)		
One-shot/Multi-shot	1 Shot ~65,535 Shots		
SIO (RS-232)	IIDC v3.1version : Pass Through or IMI-Tech Command		
Digital Interface	IEEE 1394a (6pin) 1 Port		
Transfer Rate	400 Mbps		
Shutter	1usec ~ 3600 sec (Manual or Auto)		
Gain Control	0~18 dB (Manual or Auto)		
S/N Ratio	56dB or better		
Control Function	Brightness, Sharpness, Gamma, Auto-Exposure, Auto-Shutter, Auto Gain, Pan/Tilt, Auto White Balance, LUT (4point, user defined)		
Lens Mount	C Mount		
Supply Voltage & Power	8 VDC~ 30 VDC, 260mA 12V DC		
Dimensions / Weight	44 (W) x 29 (H) x 63 (D) mm / approx. 110 gram		

Note : Specification may be subject to change without notice.