

IQeye PROLINE



IQeye Sentinel™ Series All-Weather Megapixel IP Camera

PRODUCTS



IQeye Sentinel Series

The IQeye Sentinel Series comes in multiple resolution options from 1.3 to 5.0 megapixels, and is available in both standard and day/night configurations. A wide variety of high quality lenses are available to deliver superb images in any application.



NEW! IQeye Event Recording System (ERS)

The IQeye Event Recording System (ERS) is a self-contained High-Definition megapixel network recorder that uses NO BANDWIDTH to record crisp, clear video, making it perfect for installations where network bandwidth is a premium.



Pole Mount Adapter

This exclusive pole mount adapter allows you to mount IQeye Sentinel weatherproof security cameras to any pole with a diameter of 4 to 14 inches. It's easy to install and includes all necessary mounting hardware.




Junction Box Cover

The junction box cover allows you to install the camera back box and IQeye Sentinel weatherproof surveillance camera separately while preserving the junction box electronics. The cover matches the junction box exactly and can be re-used on multiple outdoor security camera installations.

The IQeye Sentinel Series is the first All-Weather Megapixel Network Camera that is entirely Power-over-Ethernet, featuring an integrated, vandal and tamper-resistant design. Sentinel's exclusive pivoting arm allows you to use the same camera for wall, ceiling or parapet mounting with no additional hardware. The entire unit is designed to withstand the harshest weather conditions, including hot, cold and wet environments.

This indoor/outdoor surveillance camera is available in 1.3, 2.0, 3.1 and 5.0 megapixel models, standard or day/night, with a variety of quality megapixel lens options so you can cover any application. Its fully-integrated IP66 housing is attractive and can withstand a wide temperature range, making it suitable for even the harshest climates.

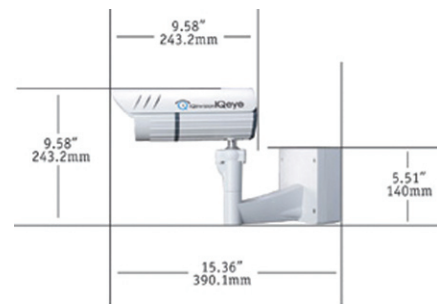

Camera weight (without lens): 96oz (2839g)

IQinVision 
www.iqeye.com



IQeye PRO LINE

IQeye Sentinel™ Series

FEATURES

- -22°F/-30°C to 122°F/50°C
- IP66 / NEMA 5 / NEMA 3R
- 1.3 Megapixels @ 30 fps
- 2.0 Megapixels @ 20 fps
- 3.1 Megapixels @ 12 fps
- 5.0 Megapixels @ 10 fps
- < 0.05 lux IR Sensitive (85x Day/Night Series)
- MultiStream Low BW + Hi Resolution
- IEEE 802.3af - Power-over-Ethernet
- LIGHTGRABBER™ II Low-light Feature
- Digital Image Cropping
- Alarm IO
- 6 watts Power-over-Ethernet, AC or DC
- Include/Exclude Exposure Window, Privacy Zones

All-Weather Camera System

By delivering an all-in-one surveillance solution, IQeye Sentinel IP security cameras not only alleviate sourcing issues, but also lower the total cost of ownership. Installation costs are reduced as well because installing and configuring an IQeye Sentinel outdoor security camera is fast and easy. Using just a single tool, you can open the junction box, adjust the gimbal, access the lens for focusing, and remove or install the sun shield.

IQrecorder™

Available with every IQeye PRO LINE camera, IQrecorder enables you to record and playback crisp, clear IQeye Resolution™ images using affordable network storage with no client software. User-friendly features include simultaneous playback and live viewing, day-by-day scheduling, a brand new playback interface with DVD-like controls.

IQauthenticate™

Every IQeye PRO LINE camera is also available with on-camera, digital authentication that protects images right in the camera. IQauthenticate addresses the image manipulation problem, at the source, ensuring your evidence has not been compromised.

CUSTOMIZED CONFIGURATIONS

SERIES	CAMERA MODEL	LENS OPTION	POWER SUPPLY	ENCLOSURE
IQ8xx Series	IQ811 – 1.3MP Camera, 30fps, 0.1 lux	V1 – Wide Varifocal Lens	NP – No Power Supply	SS – PoE Sentinel Enclosure
	IQ802 – 2.0MP Camera, 20fps, 0.2 lux	V2 – Telephoto Varifocal Lens		
	IQ803 – 3.1MP Camera, 12fps, 0.3 lux	V4 – Telephoto Varifocal Lens		
	IQ805 – 5.0MP Camera, 10fps, 0.3 lux	V7 – Wide Varifocal IR Corrected Lens V8 – Wide Varifocal Lens		
IQ85x Day/Night Series	IQ851 – 1.3MP Camera, 30fps, <0.05 lux	V3 – Wide Varifocal Lens	NP – No Power Supply	SS – PoE Sentinel Enclosure
	IQ852 – 2.0MP Camera, 20fps, <0.05 lux	V5 – Wide Varifocal Lens		
	IQ853 – 3.1MP Camera, 12fps, <0.05 lux	V6 – Telephoto Varifocal Lens		
	IQ855 – 5.0MP Camera, 10fps, <0.05 lux	V7 – Wide Varifocal IR Corrected Lens		
SERIES	RESOLUTION OPTION	STANDARD or DAY/NIGHT	INTERIOR/EXTERIOR	LENS OPTION
IQRS – IQeye Event Recording System (ERS)	2 – 2.0MP Camera, 20fps, <0.05 lux	N – Day/Night	E – Exterior	V6 – Telephoto Varifocal Lens V7 – Wide Varifocal IR Corrected Lens

NOT ALL CONFIGURATIONS INDICATED ARE POSSIBLE. Contact IQinVision for a complete list of IQeye Sentinel configurations.

