



CV-A2

Compact 2 Megapixel Progressive Scan Camera




- Compact size 1/1.8" progressive scan monochrome CCD camera
- New 2 megapixel camera in the popular CV-A1 family
- 15 frames per second with full resolution. 1620 (h) x 1220 (v)
- 1628 (h) x 1236 (v) 4.4 μm square pixels
- Up to 70 fps with 1/6 partial scan 1620 (h) x 204 (v)
- 30 fps with vertical binning
- Internal, external HD/VD or random trigger synchronization
- Edge pre-select, pulse width control and start/stop trigger modes
- Shutter speeds from 1/15 to 1/200,000 second in 16 steps
- Programmable exposure and auto shutter
- Frame-delay and smearless readout modes
- Auto iris lens video output
- Exposure enable EEN, write enable WEN and pixel clock output
- Short ASCII commands for fast mode setup via serial port
- Setup by Windows NT/2000/XP software via RS 232C

The leading manufacturer of high performance camera solutions


Specifications for CV-A2

Specifications	CV-A2
Scanning system	Progressive scan
Pixel clock	36.15 MHz
Line frequency	18.828 kHz (1920 pixel clock/line)
Frame rate for full frame	15 frames/sec. (1252 lines/frame)
CCD sensor	Monochrome 1/1.8" IT CCD
Sensing area	7.12 (h) x 5.36 (v) mm
Effective pixels	1628 (h) x 1236 (v)
Pixels in video output.	
Full:	1620 (h) x 1220 (v) 15 frames/sec.
Vertical binning:	1620 (h) x 594 (v) 30 frames/sec.
1/2 partial:	1620 (h) x 610 (v) 28 frames/sec.
1/3 partial:	1620 (h) x 408 (v) 40 frames/sec.
1/6 partial:	1620 (h) x 204 (v) 70 frames/sec.
Cell size	4.40 (h) x 4.40 (v) μ m
Sensitivity on sensor	0.3 Lux (Max gain, 50% video)
S/N ratio	>50 dB
Video output	Composite VS signal, 1 Vpp, 75 Ω Video signal 0.7 Vpp (selectable)
Auto iris lens video output	0.7 Vpp
Gain	Manual – Automatic
Gain range	Man.: -3 to +12 dB – Auto.: -3 to +12 dB
Synchronization	Int. X-tal. Ext HD/VD or random trigger
HD sync. input/output	4 V \pm 2, 75 Ω
Trigger input	4 V \pm 2, TTL
WEN output (write enable)	4 V, 75 Ω
EEN out. (exposure enable)	4 V, 75 Ω
Pixel clock output	4 V, 75 Ω
Trigger modes	Continuous, edge pre-select, Pulse width control, frame delay readout, long time exposure, start-stop and smearless readout
Readout modes	Frame-delay readout, smearless, V-binning
Accumulation	HD synchronous or HD a-synchronous
Shutter speed, EPS	1/15 to 1/200,000 second
Programmable exposure	1 H to 1252 H in 1 H steps
Pulse width control	1 H to 2047 H
Long time exposure	<2 sec. (Interval between ext. VD)
Frame-delay readout PWC	1 H to 2047 H
Smearless readout	For edge pre-select mode only
Functions controlled by RS 232C	Shutter speed, Trigger mode, Readout mode, Programmable exposure, Gain levels, timing signals and polarity
Functions controlled by internal DIP switches	VD input/output, HD input/output HD, VD 75 Ω termination on/off
Operating temperature	-5°C to +45°C
Humidity	20 - 80% non-condensing
Storage temp./humidity	-25°C to +60°C/20% - 80 %
Vibration	10G (20Hz to 200Hz XYZ)
Shock	70G
Regulations	CE (EN50081-1 and EN50082-1), FCC part 15
Power	12V DC \pm 10%. 2.3 W
Lens mount	C-mount
Dimensions	29 x 44 x 66 mm (HxWxD)
Weight	150 g


Readout Formats

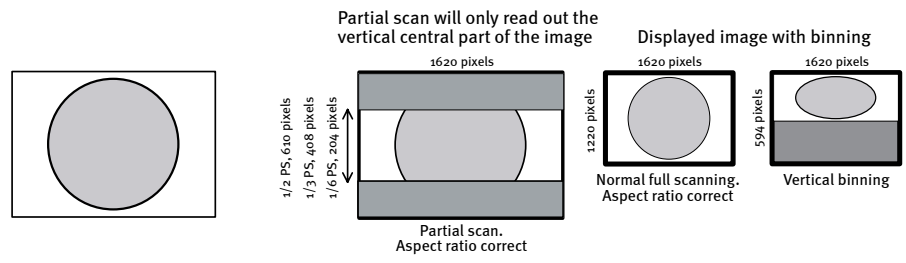

Connection Description

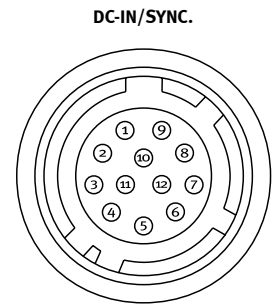


- HIROSE HR10A-10R-12PB-01
- Pin 1 Ground
2 +12V DC
3 Ground
4 Video/Iris video output *)
5 Ground
6 HD input/HD output *)
7 VD input/VD output *)
8 Ground
9 Pixel clock output *)
10 WEN output
11 Trigger input
12 Ground

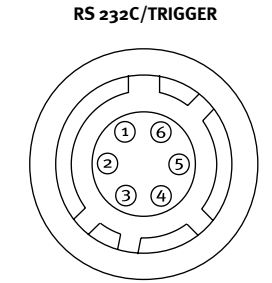






- HIROSE HR10A-7R-6PB
- Pin 1 TXD
2 RXD
3 Ground
4 Ground
5 Trigger input
6 EEN/WEN output *)
- *) Can be changed

Plugs for cable:
12 pin: HIROSE HR10A-10P-12S
6 pin: HIROSE HR10A-7P-6S

Spectral Sensitivity

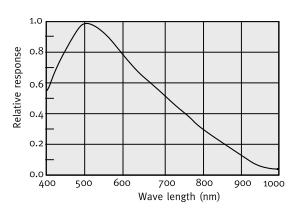

Dimensions

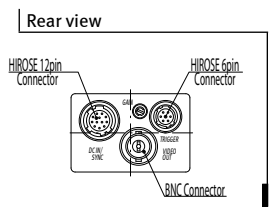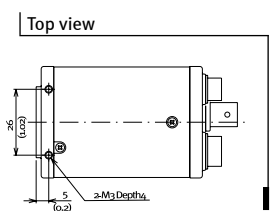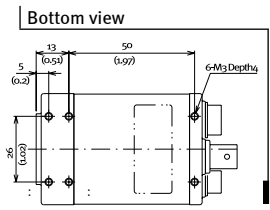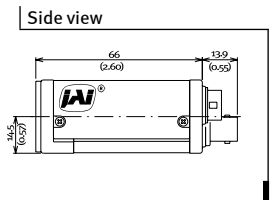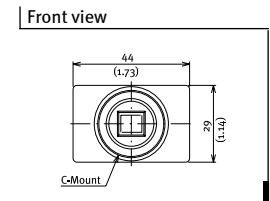

Ordering Information

CV-A2 1/1.8" Compact 2 Mega Pixel Progressive Scan Camera

MP40 Tripod Adapter (must be ordered separately)



THE MECHAEMIC COMPANY

Company and product names mentioned in this datasheet are trademarks or registered trademarks of their respective owners. IAI A.S. cannot be held responsible for any technical or typographical errors and reserves the right to make changes to products and documentation without prior notification.