


# DELUXE HEAVY SWING ARM STAND

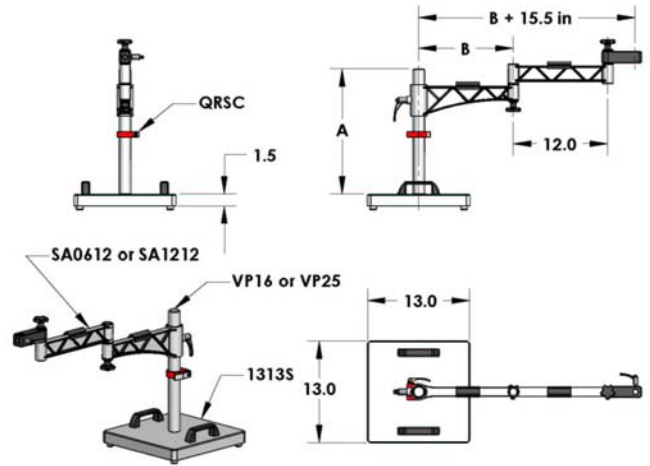

## Swing Arm Heavy Stand Components

- 1313S 13" x 13" x 1½" powder coated steel base with four rubber feet, carrying handles, 78 lbs.
- VP16 1½" diameter x 16" long stainless steel vertical post drilled to accept ½-13 UNC bolt.
- VP25 1½" diameter x 25" long stainless steel vertical post drilled to accept ½-13 UNC bolt.
- SA0612 Swing Boom Arm, approx. 21.5" maximum horizontal extension, measured from center to center of the vertical post to the "bonder pin" mount. This arm allows the arm to be swing at four pivot points. Each pivot point maybe locked individually. Accepts the industry standard 5/8" "Bonder Pin" mounted end on, above or below the bar.
- SA1212 Swing Boom Arm, approx. 27.5" maximum horizontal extension, measured from center to center of the vertical post to the "bonder pin" mount. This arm allows the arm to be swing at four pivot points. Each pivot point maybe locked individually. Accepts the industry standard 5/8" "Bonder Pin" mounted end on, above or below the bar.
- QRSC Red anodized aluminum safety clamp featuring a clear anodized aluminum quick release handle incorporating all stainless steel and brass hardware.

Assembly Number	A* (in)	B (in)	Maximum Extension (in)	Stand Specific Components	Common Components
OS1313S-16SA0612	16	6	21.5	VP16, SA0612	1313S
OS1313S-16SA1212		12	27.5	VP25, SA1212	QRSC
OS1313S-25SA0612	25	6	21.5	VP16, SA0612	1313S
OS1313S-25SA1212		12	27.5	VP25, SA1212	QRSC

\* Custom length vertical posts available upon request.



OLD SCHOOL INDUSTRIES, INC.