
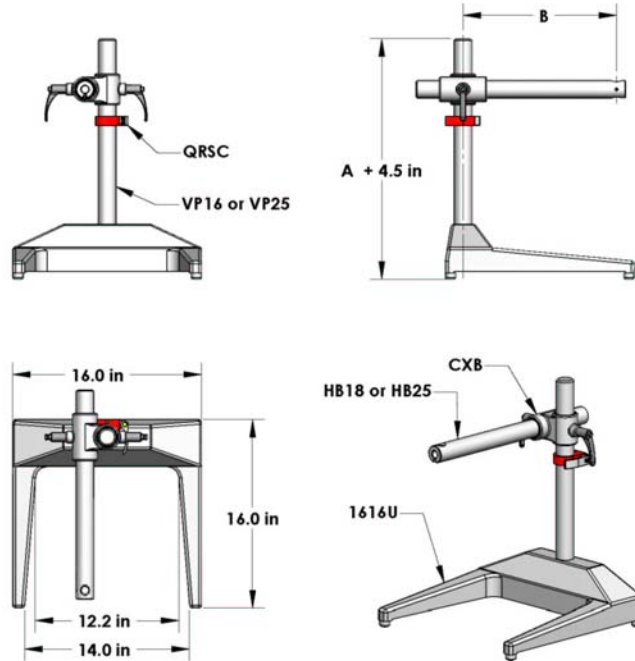


U-BASE STANDS

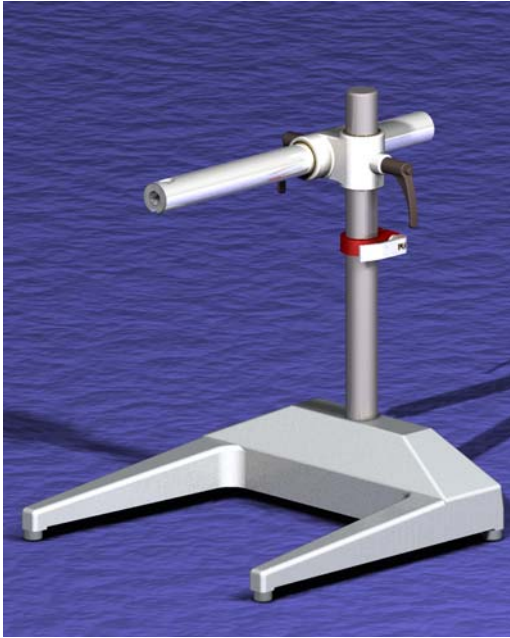

U-Base Stand Components

- 1616U 16" x 16" powder coated cast aluminum base with four rubber feet, 8 lbs.
- VP16 1 ½" diameter x 16" long stainless steel vertical post drilled to accept ½-13 UNC bolt.
- VP25 1 ½" diameter x 25" long stainless steel vertical post drilled to accept ½-13 UNC bolt.
- HB18 1 ½" diameter x 18" long keyed anodized aluminum horizontal bar with industry standard 5/8" "Bonder Pin" hole for end on, above or below mounting.
- HB25 1 ½" diameter x 25" long keyed anodized aluminum horizontal bar with industry standard 5/8" "Bonder Pin" hole for end on, above or below mounting.
- QRSC Red anodized aluminum safety clamp featuring a clear anodized aluminum quick release handle incorporating all stainless steel and brass hardware.
- CXB Cast aluminum, powder coated cross block with bronze bushings and adjustable handles.



Assembly Number	A* (in)	B (in)	C (in)	Stand Specific Components	Common Components
OS1616U-1618	16	14.75	¾	VP16, HB18	1616U CXB QRSC
OS1616U-2518	25	14.75	¾	VP25, HB18	
OS1616U-1625	16	21.75	¾	VP16, HB25	
OS1616U-2525	25	21.75	¾	VP25, HB25	

* Custom length vertical posts available upon request.



OLD SCHOOL INDUSTRIES, INC.

U-BASE STANDS

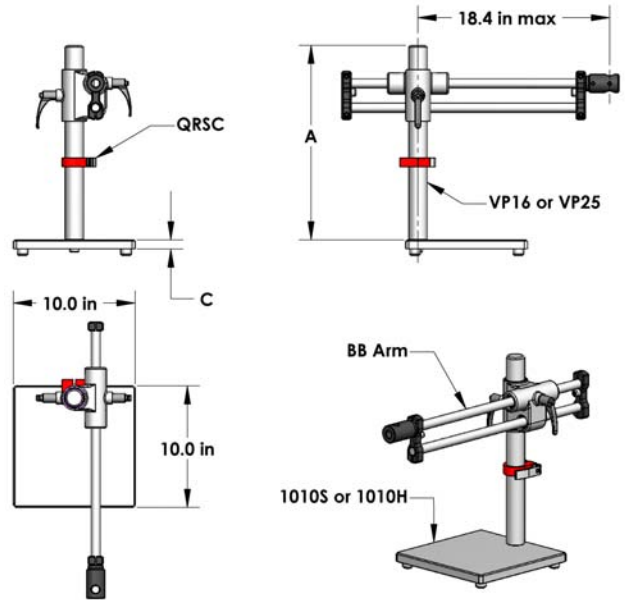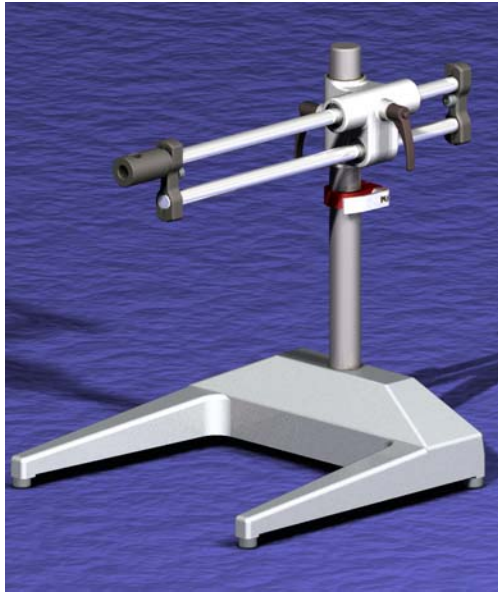



Ball Bearing U-Base Stand Components

- 1616U 16" x 16" powder coated cast aluminum base with four rubber feet, 8 lbs.
- VP16 1 ½" diameter x 16" long stainless steel vertical post drilled to accept ½-13 UNC bolt.
- VP25 1 ½" diameter x 25" long stainless steel vertical post drilled to accept ½-13 UNC bolt.
- BB Cast aluminum, powder coated cross block featuring bronze bushings for the vertical axis and Thomson® linear ball bearings and dual hardened stainless steel shafting for the horizontal axis. Includes industry standard 5/8" "Bonder Pin" hole for end on, above or below mounting. Total horizontal motion 12 ½".
- QRSC Red anodized aluminum safety clamp featuring a clear anodized aluminum quick release handle incorporating all stainless steel and brass hardware.

Assembly Number	A* (in)	B (in)	Stand Specific Components	Common Components
OS1616U-16BB	16	¾	VP16	1616U BB
OS1616U-25BB	25	¾	VP25	QRSC
* Custom length vertical posts available upon request.				



U-BASE STANDS

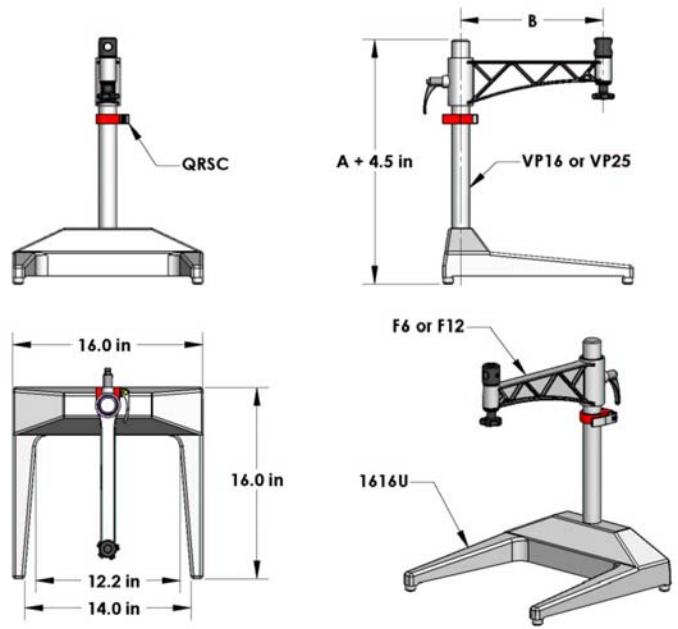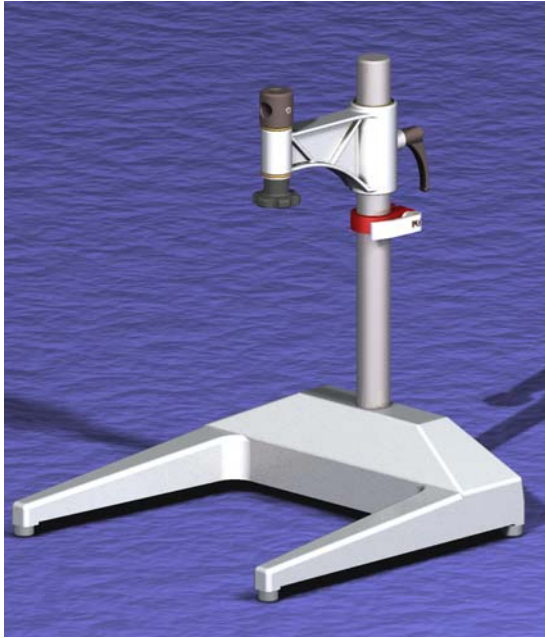

Fixed Arm U-Base Stand Components

- 1616U 16" x 16" powder coated cast aluminum base with four rubber feet, 8 lbs.
- VP16 1 ½" diameter x 16" long stainless steel vertical post drilled to accept ½-13 UNC bolt.
- VP25 1 ½" diameter x 25" long stainless steel vertical post drilled to accept ½-13 UNC bolt.
- F6 6" reach Cast aluminum fixed distance boom. Allows rotation of "Bonder Pin" mounting holes to rotate around a vertical axis. Accepts the industry standard 5/8" "Bonder Pin" mounted end on, above or below the bar.
- F12 12" reach Cast aluminum fixed distance boom. Allows rotation of "Bonder Pin" mounting holes to rotate around a vertical axis. Accepts the industry standard 5/8" "Bonder Pin" mounted end on, above or below the bar.
- QRSC Red anodized aluminum safety clamp featuring a clear anodized aluminum quick release handle incorporating all stainless steel and brass hardware.

Assembly Number	A* (in)	B (in)	Stand Specific Components	Common Components
OS1616U-16F6	16	6	F6	1616U
OS1616U-16F12	16	12		VP16
OS1616U-25F6	25	6	F12	QRSC
OS1616U-25F12	25	12		1616U
* Custom length vertical posts available upon request.				