



Flexible light guide single

Flexible Light Guides

1-branch

Feature:

- Flexible light guides are available in different lengths and diameters.
- Articulating arm and different holders for positioning available.
- Focusing lenses, color filters and polarizers available.
- Manufactured in the EU.

Benefit:

High flexibility for different illumination techniques as well as remote illumination.




Flexible light guide for KL 2500 LCD

Flexible Light Guides, 1-branch


Cold light source	Part-No.	Type	Length		End tip Ø		Active Ø/ branch	Jacketing material	Outer Ø Jacketing		Light source adapter Ø	
			L	E	I	b			D	F		
KL 200	121 101	1 branch	600 mm 23.62 inch	6 mm 0.24 inch	20 mm 0.79 inch	4.5 mm 0.18 inch	Megolon	6 mm 0.24 inch	9 mm 0.35 inch			
KL 1500 LCD KL 2500 LCD	155 101	1 branch	1000 mm 39.37 inch	6 mm 0.24 inch	20 mm 0.79 inch	3.0 mm 0.12 inch	M-PVC	6.8 mm 0.27 inch	10 mm 0.39 inch			
	155 102		1600 mm 62.99 inch	6 mm 0.24 inch	20 mm 0.79 inch	5.0 mm 0.20 inch	M-PVC	9.8 mm 0.39 inch	10 mm 0.39 inch			
	155 103		1000 mm 39.37 inch	10 mm 0.39 inch	20 mm 0.79 inch	8.0 mm 0.32 inch	M-PVC	14 mm 0.55 inch	10 mm 0.39 inch			

Cold light source	Part-No.	Type	Length		End tip Ø		Active Ø/ branch	Jacketing material	Outer Ø Jacketing		Light source adapter Ø	
			L	E	I	b			D	F		
KL 2500 LCD only	250 101	1 branch	1000 mm 39.37 inch	17 mm 0.67 inch	20 mm 0.79 inch	12 mm 0.47 inch	M-PVC	19.2 mm 0.76 inch	20 mm 0.79 inch			
	250 102		1000 mm 39.37 inch	17 mm 0.67 inch	20 mm 0.79 inch	15 mm 0.59 inch	M-PVC	21.2 mm 0.84 inch	20 mm 0.79 inch			
	250 103		1500 mm 59.06 inch	17 mm 0.67 inch	20 mm 0.79 inch	15 mm 0.59 inch	M-PVC	21.2 mm 0.84 inch	20 mm 0.79 inch			

Flexible Light Guides

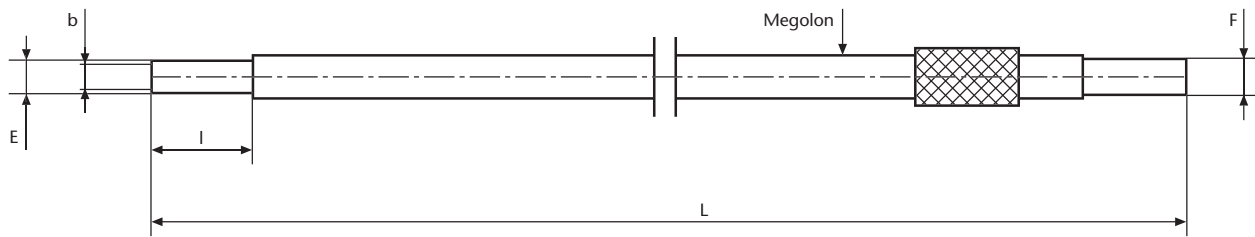

Flexible Light Guides, 1-branch – KL 200, KL 1500 LCD, KL 2500 LCD

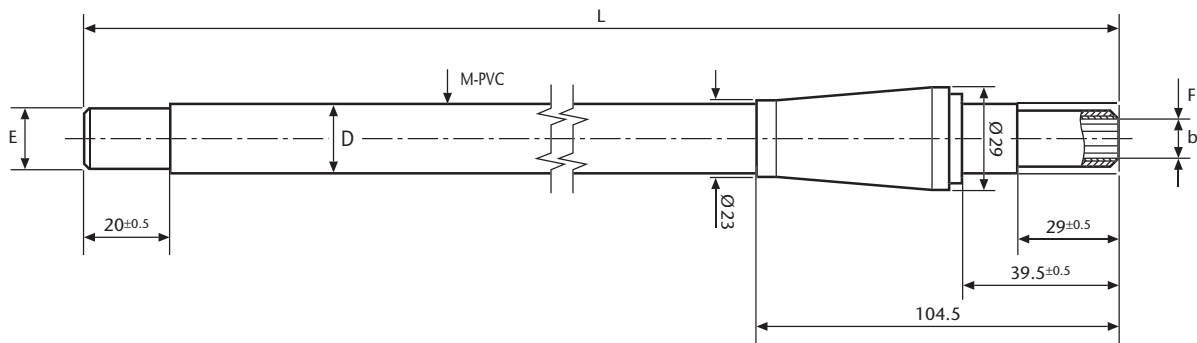

Flexible Light Guides, 1-branch – KL 2500 LCD only