


- Indoor/Outdoor installations
- Aluminium epoxy painted
- Hinged removable body
- Wide range of accessories available
- Weatherproof Standard IP66



HEM30K




Its dimensions make it suitable for CCD cameras equipped with fixed lenses.

Made of extruded and die-cast aluminium, it is provided with an innovative opening system which allows access to the housings's interior; the body and the sunshield slide forward and hang in place, while the unit remains fixed allowing access to the camera from all angles. This can be done from either sides for a rapid installation and an easy adjustment.

Its weatherproof features are ensured by EPDM-rubber gaskets and by 1 PG9 and 1 PG11 cable glands with their specific gaskets. A wide range of accessories is available, including sunshield, heater standard or fan-assisted kit, blower kit and camera power supply. The accessories are supplied factory installed or as simple upgrade kit.

MODELS					
	Length mm / in	Sunshield	Heater 115/230VAC	Heater 12VDC/24VAC	Heater 24VAC fan-assisted
HEM22D0A000	220 / 8.5				
HEM22K0A000	220 / 8.5	•			
HEM22K1A000	220 / 8.5	•	•		
HEM22K2A000	220 / 8.5	•		•	
HEM26D0A000	260 / 10				
HEM26K0A000	260 / 10	•			
HEM26K1A000	260 / 10	•	•		
HEM26K2A000	260 / 10	•		•	
HEM30D0A000	300 / 12				
HEM30K0A000	300 / 12	•			
HEM30K1A000	300 / 12	•	•		
HEM30K2A000	300 / 12	•		•	
HEM30K2A015	300 / 12	•			•

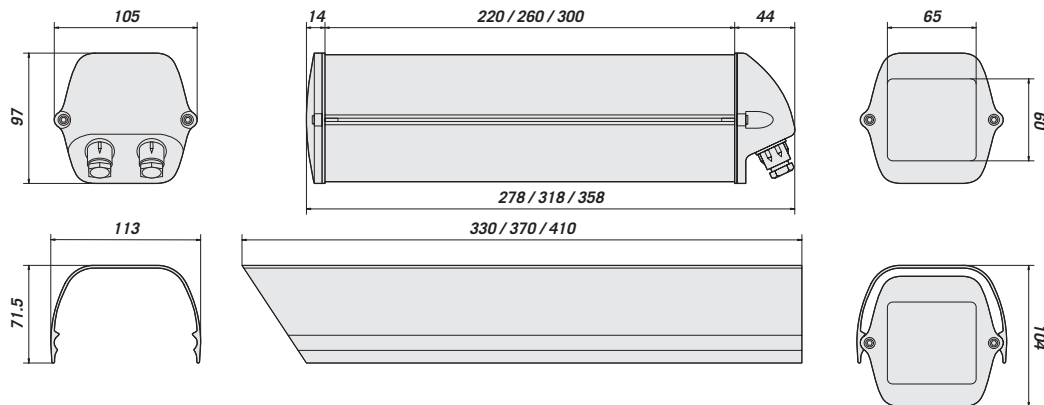

The values are in millimeters.

TECHNICAL DATA

GENERAL

- Die-cast aluminium back and front cover plates
- Extruded aluminium body and external slide
- Epoxypolyester powder painted colour RAL9002
- Stainless steel external screws
- Supplied with: instruction manual, desiccant bag, accessories for camera and lens mounting

MECHANICAL

- 2 cable-glands: 1xPG9 and 1xPG11
- Internal usable dimensions (WxH): 70x65 mm (2.75x2.55 in)
- Glass window (WxH): 65x60 mm (2.55x2.36 in)

Usable length mm (in):

Housing:

HEM22	220 mm (8.66 in)
HEM26	260 mm (10.23 in)
HEM30	300 mm (11.81 in)

Housing with heater:

HEM22	150 mm (5.9 in)
HEM26	190 mm (7.48 in)
HEM30	230 mm (9.05 in)

Housing with heater and/or camera power supply:

HEM26	170 mm (6.69 in)
HEM30	210 mm (8.26 in)

Housing with heater and/or blower:

HEM26	190 mm (7.48 in)
HEM30	230 mm (9.05 in)

ELECTRICAL

Heater, Ton 15°C+/-3°C (59°F) Toff 22°C +/-3°C (71°F):

OHEH01	IN 12VDC/24VAC, consumption 20W
OHEH02	IN 115/230VAC, consumption 40W

Blower with air filter and thermostat, Ton 35°C +/-3° (95°F) Toff 20°C +/-3° (68°F):

HEMV12	IN 12VDC, consumption 4 W (max)
HEMV24	IN 24VAC, consumption 4 W (max)

Camera power supply:

OHEPS05	IN 230VAC, 50Hz - OUT 12VDC, 400mA max
OHEPS06	IN 230VAC, 50Hz - OUT 24VAC, 400mA max

ACCESSORIES

OHEMS22	Sunshield 220mm
OHEMS26	Sunshield 260 mm
OHEMS30	Sunshield 300 mm
OHEH01	Heater IN 12VDC/24VAC
OHEH02	Heater IN 115/230VAC
OHEMV1	Blower with thermostat and air filter IN 12VDC
OHEMV2	Blower with thermostat and air filter IN 24VAC
OHEPS05	Camera power supply IN 230VAC - OUT 12VDC
OHEPS06	Camera power supply IN 230VAC - OUT 24VAC
OHEGBB	Junction box

RELATED PRODUCTS

Mounts:

WBM	Wall mount
WFC	Column mount
WCM3	Ceiling mount
WCM5	Ceiling mount

P&T:

PTH300 series	P&T, 50/60Hz
PTH900 series	P&T, 50/60Hz

ENVIRONMENTAL

- Indoor/outdoor
- Operating temperature:
HEM with heater -20°C up to + 50°C (-4°F up to 122°F)
- Resistant to the salt-air fog until 1000 hours (according to ISO9227)

COMPLIANCE TO

- CE according to EN 61000-6-3, EN 60065, EN 50082-1
- IP66 according to EN 60529

SPARE PARTS

OHEMFA04	HEM front cover + screws + gasket
OHEMMAN	Cable glands, gaskets and screws for HEM
DOTHE02	HEM accessories for camera and lens mounting



Unit Weight (kg / lb):

HEM22K	1,55 / 3.41
HEM26K	1,8 / 3.96
HEM30K	1,95 / 4.29

Package Weight (kg / lb):

HEM22K	1,75 / 3.85
HEM26K	2 / 4.4
HEM30K	2,3 / 5.07

Package Dimensions (cm / in):

HEM22K	13,5x13,5x45 / 5.31x5.31x17.71
HEM26K	13,5x13,5x45 / 5.31x5.31x17.71
HEM30K	13,5x13,5x45 / 5.31x5.31x17.71

Master Carton (units):

HEM22K	12
HEM26K	12
HEM30K	12