


BK-56 & BK-56c
Sprinkler Head CCD Camera

The **BK-56** and **BK-56c** (colour) sprinkler head surveillance CCD camera system blends nicely into the industrial, office or retail environments, allowing for surveillance of activity and personnel below.

The covert sprinkler head system is easily installed into a drop ceiling or with a magnet on any steel supporting structure.

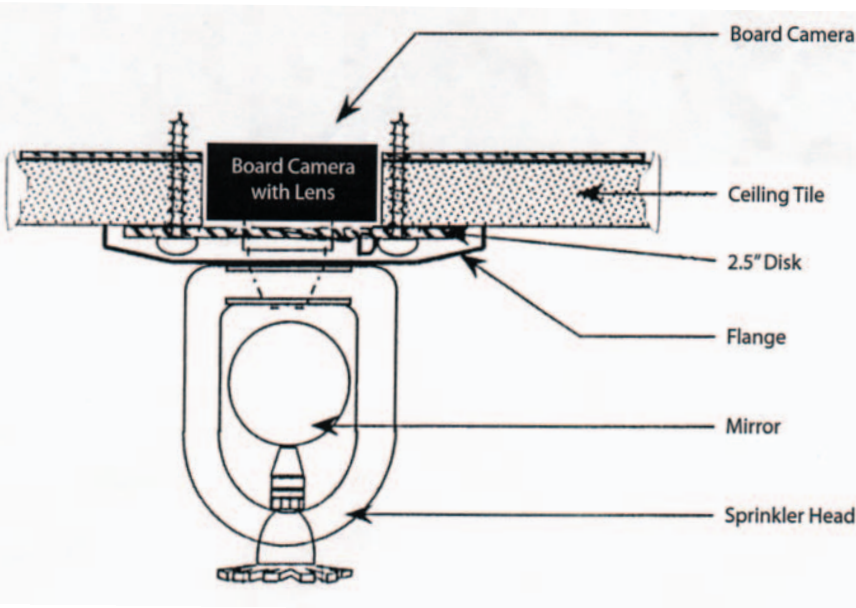

The BK-56 has a mirror image switch to correct the reversing effect of the sprinkler head mirror. Both cameras use an electronic shutter to automatically adjust for challenging light conditions.

FEATURES

- CCD camera disguised as a sprinkler head
- Available in B&W or colour camera
- Pre-wired and mounted camera
- Horizontal and vertical adjustment
- Quick installation

SPECIFICATIONS

GENERAL

	BK-56 (Black & White)	BK-56c (Colour)
Imager	1/3" Interline Transfer CCD	1/3" Interline Transfer CCD
Imager Size	542(H) x 492(V)	768(H) x 494(V)
Scanning	EIA, 2:1 interlace	NTSC, 2:1 Interlace
Resolution	400(H) TV Lines	330(H) TV Lines
Image format	Normal or Mirror	Normal
Sync	Internal	Internal
AGC	On/Off selectable	On/Off selectable
Min. Illumination	0.1 lux (0.01fc) @f1.4	5.0 lux @ f1.4
S/N Ratio	48Db or greater	48Db or greater
Iris	Electronic iris (1/60sec.~1/30,000sec.)	Electronic iris (off, 1/60sec.~1/30,000sec.)
Power	DC 12V (120mA)	DC 7-15V (245mA)
Operating Temp.	-10°C ~ +55°C	-5°C ~ +40°C
Weight	120g.	130g.
Size	Ø70mm x 80mm	Ø70mm x 89mm



BOCK OPTRONICS INC.
14 Steinway Blvd., Unit 7
Toronto, Ontario M9W 6M6, Canada
Tel: 416-674-2804 Fax: (416) 674-1827

Quebec & Eastern Canada
Tel: 450-662-9889
Fax: 450-662-9063

Website: www.bockoptronics.ca
E-mail: sales@bockoptronics.ca