

Viewlock II KeySafe



Viewlock-II Secondary Encryption Key Programmer

- **Programs Viewlock-II with a Secondary Encryption Key.**

KeySafe is a convenient way of programming the Secondary Encryption Key in Ovation System's Viewlock-II video encryption

- **Stores up to 12 different pre-set Keys.**
- **Can also be used to clear the Secondary Encryption Key**
- **Works with Viewlock-II, micro-Viewlock-II and Audiolock-II**
- **Small size - 32mm x 58mm x 115mm**
- **Battery operated for field operation (Estimated life is four years)**
- **Can be used almost anywhere!**

system without the use of a PC or laptop computer.

In addition to the Primary (factory set) Encryption Key, Viewlock-II has a Secondary (user definable) Encryption Key which is only known by the end user. This allows Viewlock-II encoders and decoders to be uniquely keyed as required. Also, in the highly unlikely event of a decoder entering the 'wrong hands', the Viewlock-II system can be easily reprogrammed in a way that will only be known to the legitimate user.

Previously, the only way to program the Secondary Encryption Key has been directly with a PC or laptop which is not ideal for field operation. However once KeySafe has itself been programmed*, a serial interface cable is all that is additionally required.


KeySafe is battery operated with an estimated battery life in excess of four years.

*A copy of Ovation System's VL2-Talk software is required to program KeySafe and is supplied as part of the package along with all required serial cables for use with Viewlock-II, micro-ViewLock-II and Audiolock-II.

KeySafe Technical Overview



Application of KeySafe

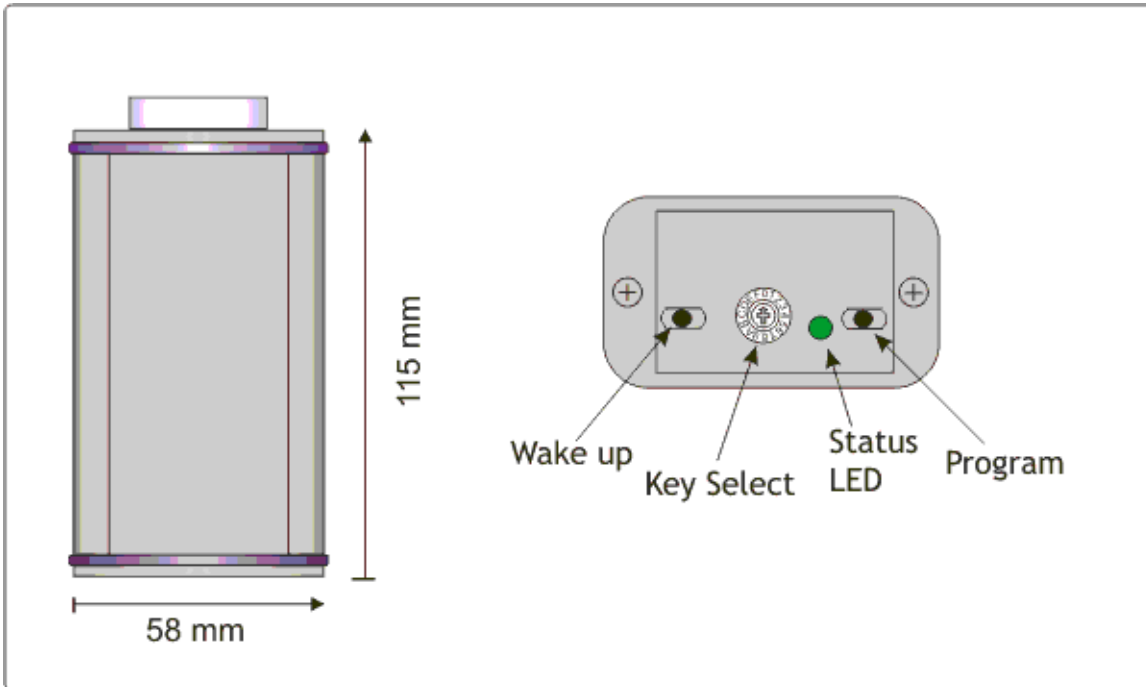

Dimensions & Interfaces of KeySafe

KeySafe Specification:

Outline Specifications:

| | |
|-----------------------------|----------------------------------------------------------------------------------|
| Mechanical size (housed) | 32 x 58 x 115 mm |
| Operating temperature range | 0 to +55 deg C |
| Finish | Painted aluminium |
| Weight (housed) | 170g. |
| DC power | Internal battery |
| Battery life | >4 years with average use |
| Standard accessories | User guide, VL2-Talk software on CDROM, RS232 interconnecting cables, carry case |

Programming

| | |
|--------------------------|-------------------------------------------------------|
| Number of secondary keys | 12 + Secondary Key Clear |
| Compatibility | Viewlock-11, micro-Viewlock-II & Audiolock-II |
| Other requirements | PC or Laptop with RS232 port to run VL2-Talk software |

Please note: Viewlock-II, micro-Viewlock-II and Audiolock-II are sold separately

Due to continual product development Ovation Systems reserve the right to change specifications without notice. E&OE.

KeySafe operates with [Viewlock-II](#) and [micro-Viewlock-II](#)